

Soap Dispensers

Model 6542 – Liquid Soap *Bradex*[®] Model 6542-73 – Foam Soap *Bradex*[®]

- 🗹 Tank Type Horizontal
- Surface-Mounted
- ADA Compliant

Product Materials

Body: 20 gauge stainless steel with exposed surfaces in architectural satin finish. **Back:** 20 gauge stainless steel; welded to the body.

Wall Plate: stainless steel.

Liquid Soap Valve: chrome-plated brass housing with ABS plastic mechanism. Foam Soap Valve: chrome-plated ABS mechanism.

Capacity

40-oz. liquid or bulk foam soap.

Operation

Push-in valve dispenses measured amount of vegetable or coconut oil liquid soaps, synthetic detergents, antiseptic solutions or foam soap with less than 5 lbs. of force. Sight gauge indicates refill time. Locked filler top opens with special key provided.

Bradley liquid soap valves operate best with any vegetable oil or coconut oil hand soap having a 10–15% soap concentration.

Bradley foam soap valves work with majority of bulk foam soap.

Installation


Verify all rough-in dimensions prior to installation. Secure separate mounting bracket to wall. Slide dispenser into place and secure locking screw through filler hole.

Guide Specification

Surface-mounted soap dispenser shall be fabricated of 20 gauge satin finish stainless steel. Dispenser shall have completely concealed mounting, vandal-resistant filler hole cover and sight gauge. Push-in corrosion-resistant soap valve. Capacity: 40-oz. liquid or bulk foam soap. Requires less than 5 lbs. of force to dispense soap.

Overall dimensions: 8-1/4"W x 4-13/16"H x 2-7/8"D.

🔄 ADA Compliant




Conformity and compliance to local and national codes is the responsibility of the installer.

Service Kits

Liquid Soap Valve - P15-408 Foam Soap Valve - P15-510

Page 1 of 1 8/27/2018 This information is subject to change without notice. Bradley_SoapDispenser_6542_6542-73

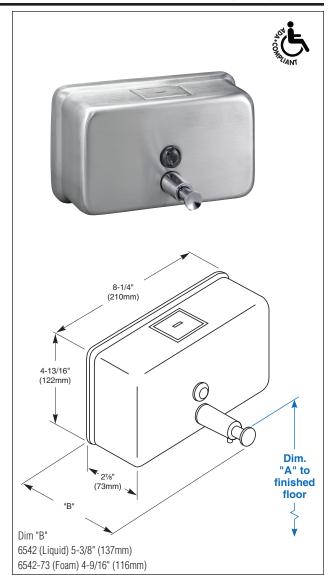

Dim. "A" Key Surface:	For Dim. "A"	Top of Unit	Bottom of Unit
Push button top to finished floor	40" (1016mm)	43¼" (1099mm)	38¾" (975mm)
	38" (965mm)	41¼" (1048mm)	36¾" (924mm)
	36" (914mm)	39¼" (997mm)	34¾" (873mm)
	34" (864mm)	37¼" (946mm)	32¾" (822mm)
Rough wall opening:			
Surface-Mount:	No rough opening, see overall dimensions		

Surface-Mount: No rough opening, see overall dimensions

© 2018 Bradley P.O. Box 309, Menomonee Falls, WI 53052-0309 800 BRADLEY (800 272 3539) +1 262 251 6000 bradleycorp.com